


INSTRUCTION BOOKLET

Type A4/B
Convertible Seat

rylo[™]

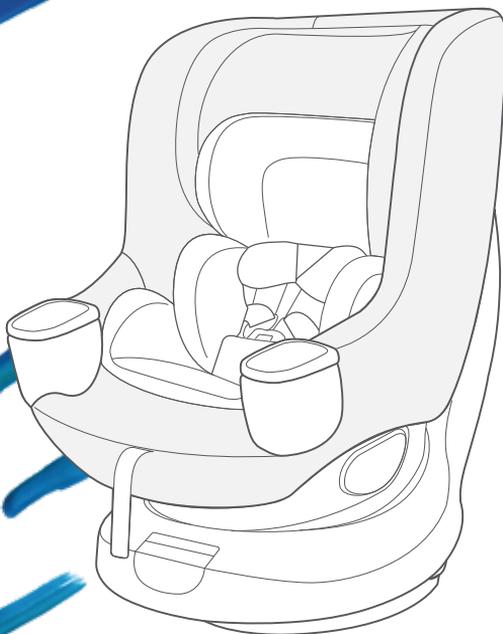

nuna[®]

model CS222

IMPORTANT: KEEP THIS INSTRUCTION BOOKLET IN THE PLACE PROVIDED ON THIS CHILD RESTRAINT


IMPORTANT:

Before installation and use of this child restraint check that it is suitable for the size of your child.

Refer to the shoulder height label information on pages 4 and 5

Which way to face the seat?


Facing the back of the vehicle for babies. Facing the front of the vehicle for bigger babies and small children.

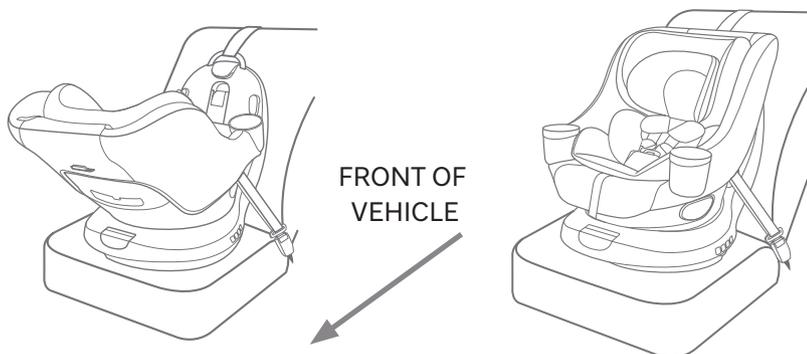

Nuna recommends children remain rear facing until at least 12 months of age



SUITABLE FOR: BABIES

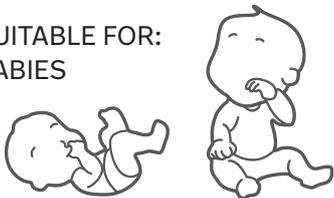

FORWARD FACING APPROX 6 MONTHS TO 4 YEARS



SUITABLE FOR: BIGGER BABIES - SMALL CHILDREN



DO NOT USE THIS CHILD RESTRAINT UNTIL YOU HAVE READ AND UNDERSTOOD THE INSTRUCTIONS IN THIS USER GUIDE AND IN YOUR VEHICLE OWNERS MANUAL

Contents

QUICK REFERENCE

Shoulder Height Labels	4 - 5
Base Installation	6 - 7
Top Tether	8 - 9
Rear facing Use	10 - 12
Forward facing Use	13 - 15

Features	16
----------------	----

WARNINGS	17
IMPORTANT INFORMATION	18 - 19

ADJUSTMENTS

Headrest Height, Headrest Back Fabric, Seat Rotation, Recline angle	20 - 22
--	---------

INSTALLATION

Seating location, airbags	23
Base	24 - 25
Checklist	26
Tether Strap	
WARNINGS	27
Installation	28 - 29
Checklist	30
Anchorage Fittings	31 - 32

USE Rear Facing

Shoulder Height Labels	33
Shoulder Strap Height	34
Infant Insert	35
Harness use	36 - 39
Checklist	40

USE Forward facing

Shoulder Height Labels	41
Shoulder Strap Height	42
Harness use	43 - 46
Checklist	47

GENERAL

Cover removing and refitting	48 - 51
After this Child Restraint	52
Care, Maintenance and Storage	53
Accessories and Spare Parts	54

Quick Reference - Base Installation

Task 2

Adjust recline angle


For more information:

page 21

Rearward facing

page 22

Forward facing

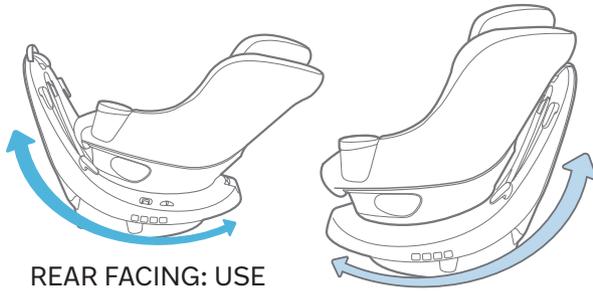

REAR FACING: USE POSITIONS 1, 2 OR 3 ONLY

FORWARD FACING: USE ANY POSITION


Task 3

Install the base.

NOTE: the seat belt path is the same for both rear and forward facing


TASK 3 ROTATE SEAT

Step 1




Task 3 OPEN LOCK-OFF BAR

Step 2

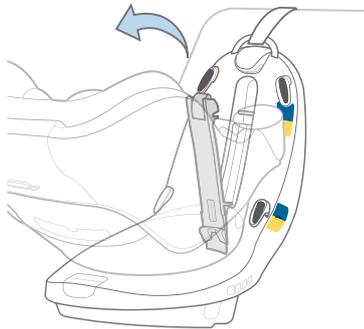

Task 3 PLACE BELT ON


Step 3 BELT PATH

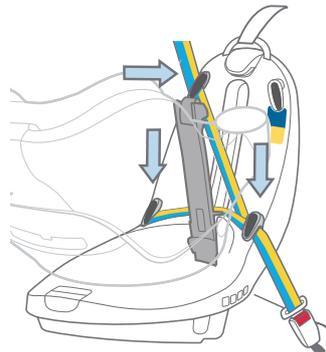

Quick Reference - Base Installation

Task 3 LATCH BELT


Step 4



Task 3 PULL BELT TIGHT &


Step 5

CLOSE LOCK-OFF BAR

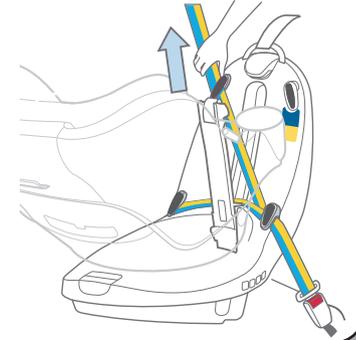

Checklist

See more information on pages 26

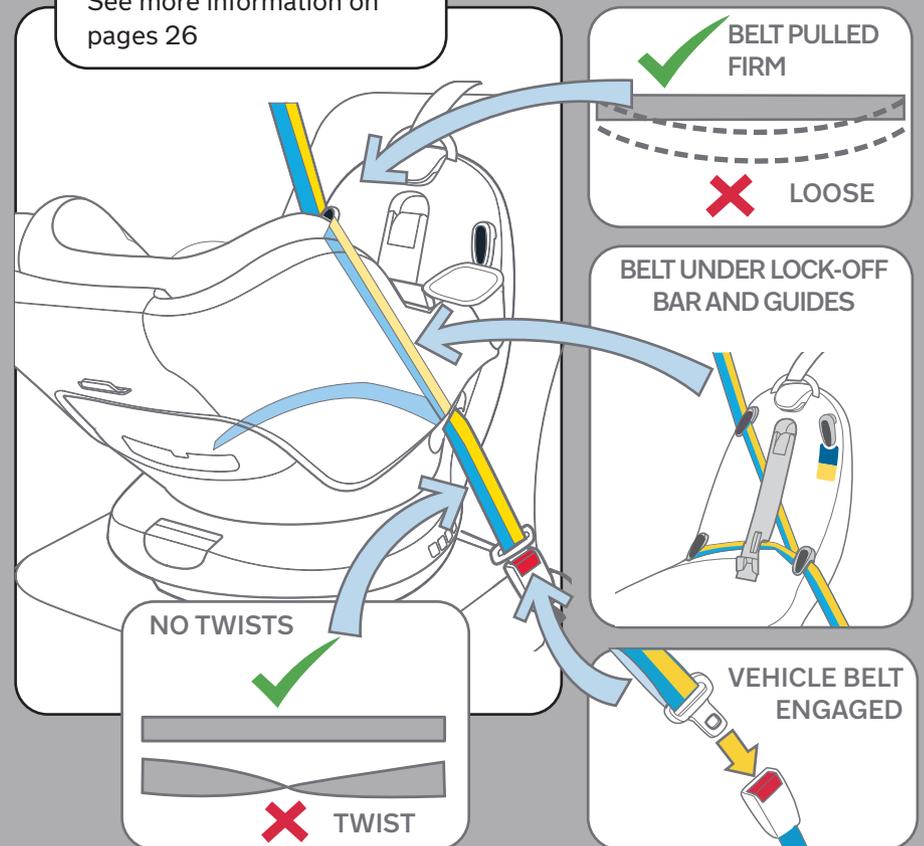

Quick Reference - Top Tether


Task 4

Attach the top tether

See more information on pages 28 - 29


Task 4 Step 1 LENGTHEN STRAP

- A Press button
- B Pull strap out

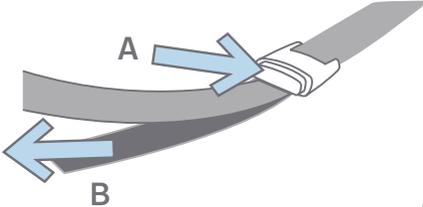


Task 4 Step 3 PULL STRAP TIGHT


- A Press button
- B Pull strap tight

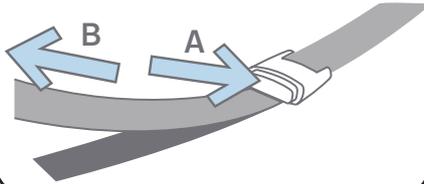

Task 4 Step 2 CONNECT SNAP HOOK

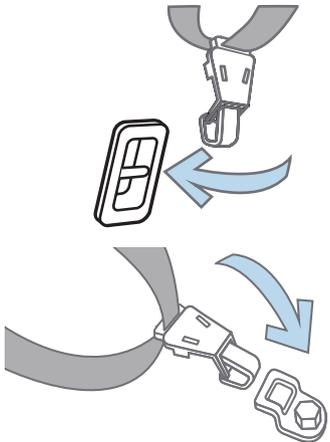


Task 4 Step 4 STORE END OF TETHER IN TETHER COVER

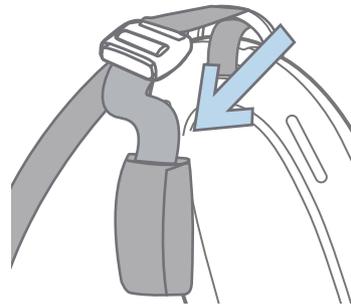

Quick Reference - Top Tether

Checklist

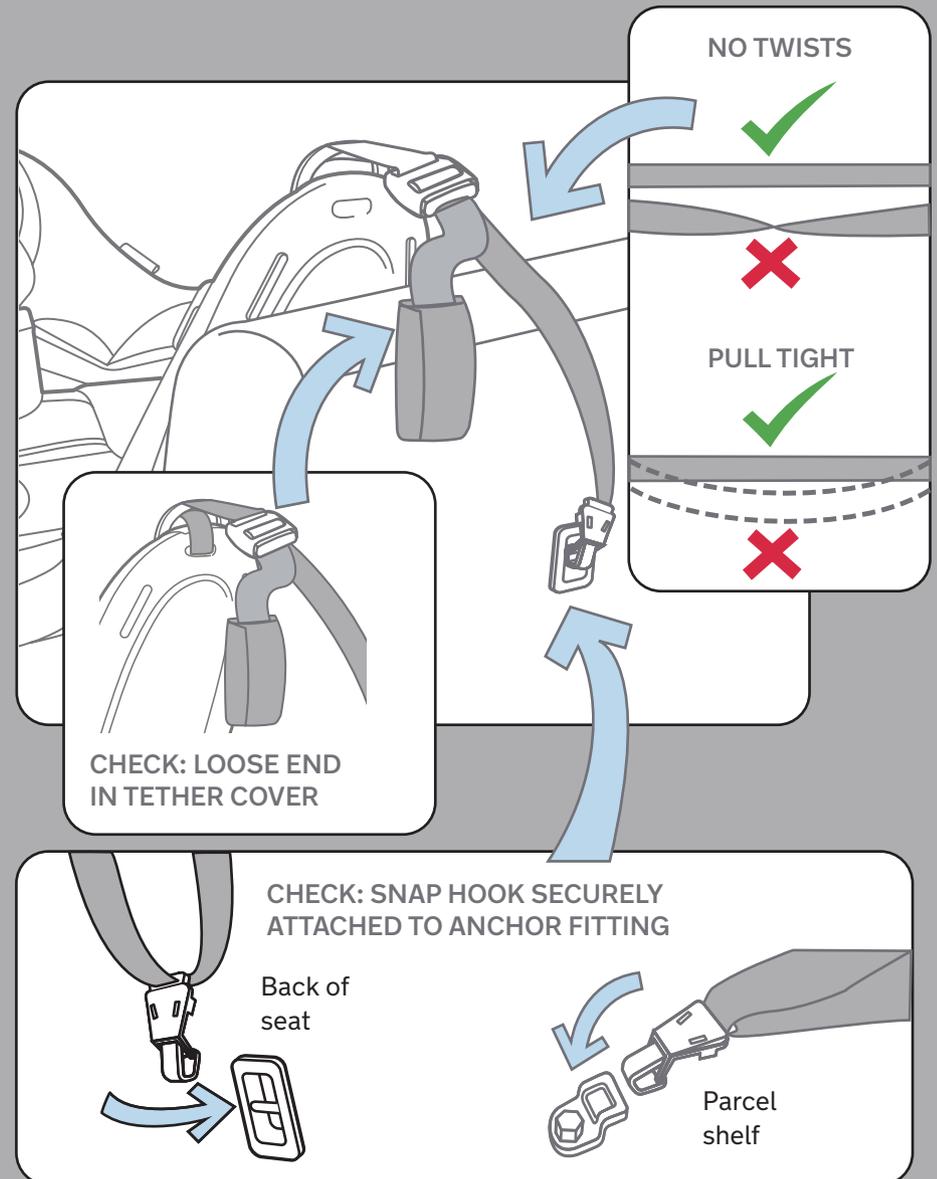

Quick Reference


Rear Facing

Task 5


Harness baby

See more information on pages 36 - 39

Task 5 LOOSEN HARNESS Step 1

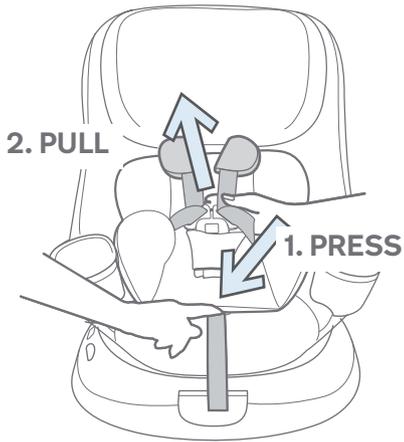


Task 5 OPEN HARNESS Step 2

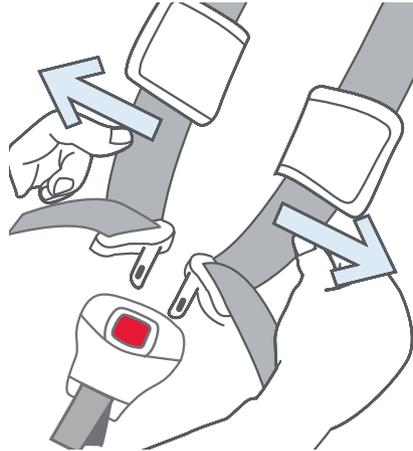

Quick Reference


Rear Facing

Task 5 PLACE CHILD IN RESTRAINT Step 3

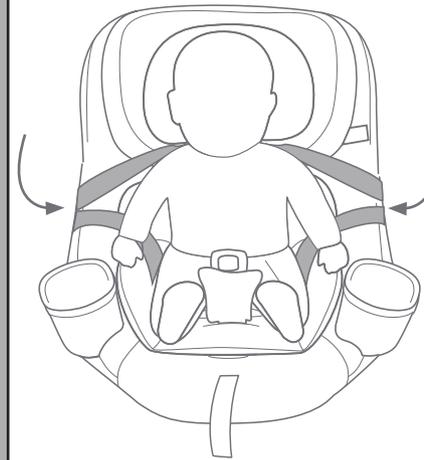


Use the magnetic clips to hold the buckle tongues

Task 5 SECURE HARNESS Step 4

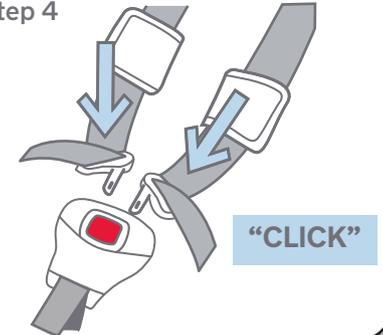


Task 5 CHECK SHOULDER STRAP HEIGHT Step 5

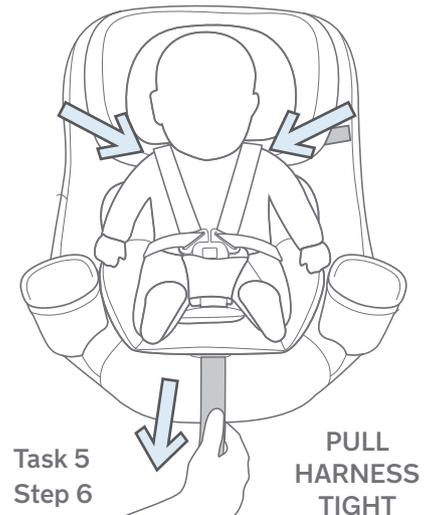


Checklist


1 CORRECT SHOULDER STRAP HEIGHT



2 NO TWISTS




3 BELTS PULLED FIRM



Suitable clothing - child's clothing must allow the harness to securely grip the child.


4 HARNESS BUCKLE ENGAGED

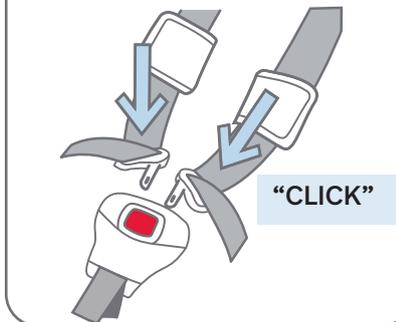


Task 6
Harness child

See more information on pages 43 - 46

Task 6 LOOSEN HARNESS
Step 1

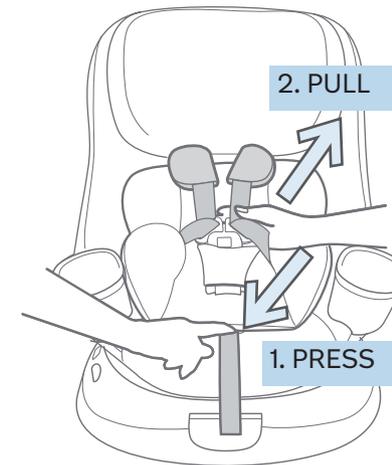


Task 6 OPEN HARNESS
Step 2

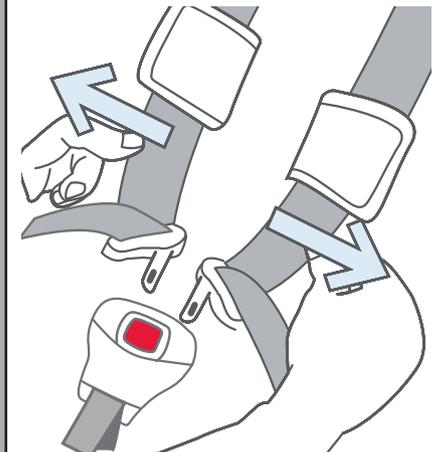

Quick Reference


Task 6
Step 3
**PLACE CHILD IN
RESTRAINT**

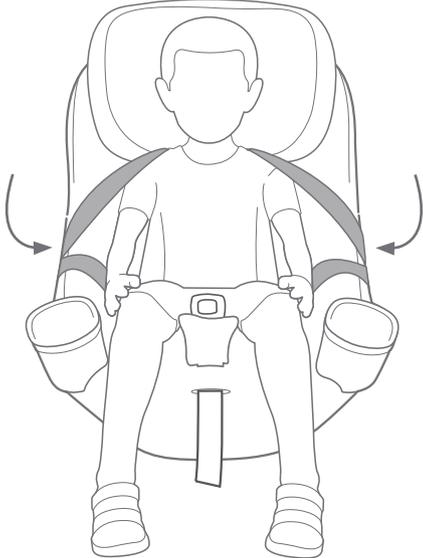

Use the magnetic clips to hold the buckle tongues

Forward Facing

Task 6
Step 4
SECURE HARNESS



Task 6
Step 5
**CHECK SHOULDER
STRAP HEIGHT**




Task 6
Step 6
**PULL HARNESS
TIGHT**

Quick Reference


Forward Facing

Checklist


1 **CORRECT SHOULDER
STRAP HEIGHT**




2 **NO TWISTS**



3 **BELTS PULLED FIRM**




Suitable clothing - child's clothing must allow the harness to securely grip the child.

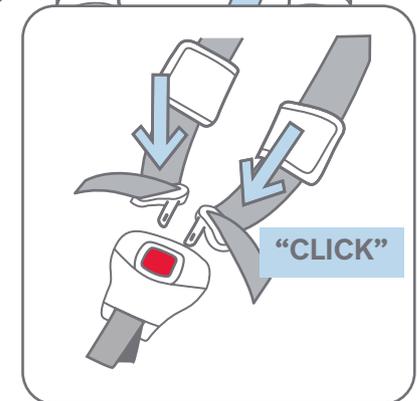

Features

- 1 Headrest
- 2 Shoulder Strap Pads
- 3 Harness Strap
- 4 Harness Buckle
- 5 Crotch Pad
- 6 Harness Release button
- 7 Harness Adjustment Strap
- 8 Recline Adjustment Button
- 9 Harness Strap
- 10 Infant Insert
- 11 Rotation Lever
- 12 Belt Path
- 13 Headrest Adjustment Lever
- 14 Tether Strap Adjuster
- 15 Tether Strap
- 16 Tether End Storage
- 17 Lock-Off Release Button
- 18 Lock-Off
- 19 Cup Holder
- 20 Turn Lock Indicator
- 21 Level Indicator
- 22 Instructions storage

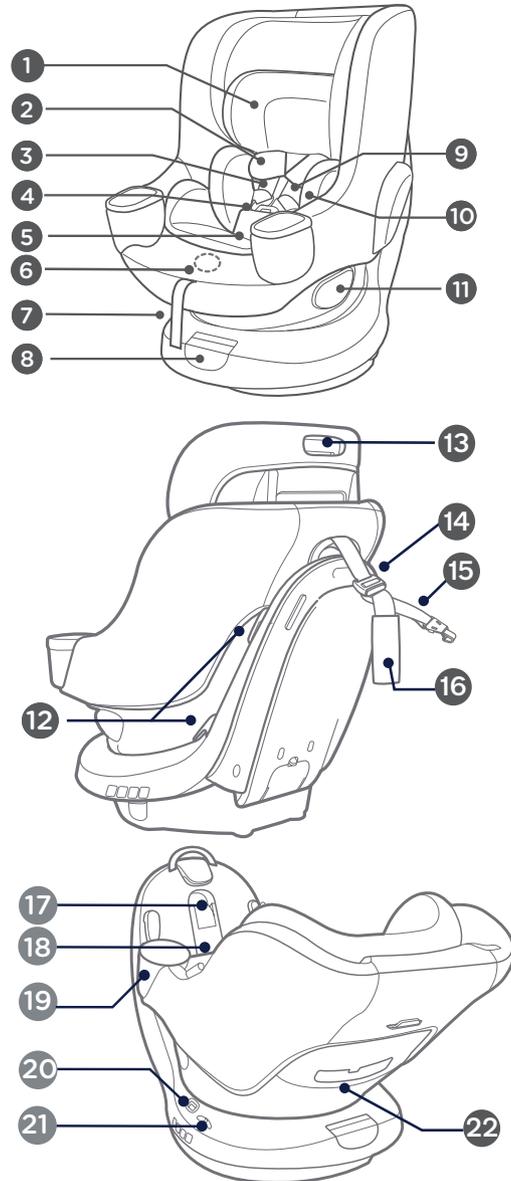

⚠ WARNINGS

- TO BE USED WITH A LAP-SASH SEAT BELT IN THE BACK OF MOST CARS WITH FORWARD FACING SEATS.
- **DO NOT LEAVE CHILDREN UNATTENDED IN THE CAR.**
- To ensure that infant's back is evenly supported, do not put more than one nappy on the baby and make sure the nappy is not folded thickly at the back.
- Do not harness an infant wrapped in a blanket or swaddled. Any blanket or wrap must only be placed over the harness and infant.
- Use the restraint exactly as shown in the instructions.
- A loose harness or restraint is dangerous.
- Fit the harness firmly to the child.
- Fit the restraint firmly to the car seat.
- Supervision of children is needed because they may be able to undo buckles.
- **DO NOT USE A REAR FACING CHILD RESTRAINT WHERE AN AIRBAG IS FITTED IN FRONT OF THE SEATING POSITION.**
- This child restraint is not approved for use with any connectors that connect to the car's ISOFIX low anchorages.
- **DO NOT USE THIS RESTRAINT WITHOUT THE COVER.**
- Do not alter or modify this restraint.
- Repairs must only be done by the manufacturer or agent.
- Do not allow the restraint to come into contact with polishes, oils, bleach and other chemicals.
- Destroy the restraint if it has been in a severe crash, even if no damage is visible.

NOTE: These warnings are those required by the Australian and New Zealand Standard AS/NZS 1754 for this type of child restraint. Other warnings specific to this particular child restraint will be found throughout these instructions.

Please read carefully the whole of the instructions for installation and in the event of doubt consult Allison AU, or a child restraint fitter, or in New Zealand the agent for the vehicle.


IMPORTANT INFORMATION

- This Child Restraint is: To be used only in a rearward-facing position until the infant's shoulders either reach the lower shoulder height marker (approximately 12 months of age) or reach the middle height marker (approximately 2 to 3 years of age).
Then to be used in a forward-facing position until the child's shoulders reach the upper shoulder height marker (approximately 4 years of age).
- Continue to use this child restraint until the child reaches this limit.
- Do not use forward facing until child's shoulders are above the lower shoulder height marker.
- Infants are at risk of serious injury if they face forward too early.
- Children are at risk of serious injury if they move to booster seats too early.
- Children who have outgrown this restraint are safest in a larger child restraint with an in-built harness, or a booster seat until their shoulders reach the upper shoulder height marker of the restraint.
- Do not use forward facing until child's shoulders are above the lower shoulder height marker.
- Ensure that children have adequate ventilation and shade when in the vehicle.
- Seat belt extenders are not recommended if the car seat belt is not long enough to secure the child restraint. If the vehicle seat belt is not long enough to secure the restraint seek advice from a child restraint fitter.
- Read carefully the whole of the instructions for the installation, and in the event of doubt about the method of installation, consult the child restraint manufacturer or agent, or a child restraint fitting station authorized by the relevant transport authority, or in New Zealand, consult the agent for the vehicle.
- Aftermarket accessories (i.e. items not provided in the box with the child restraint), may not have been tested for use with this child restraint and if used, may lower the level of protection offered possibly leading to injury or death.
- Any aftermarket accessory used should be compliant with AS/NZS 8005 (Accessories for child restraints for use in motor vehicles) and stated as suitable for use with this child restraint.

IMPORTANT INFORMATION


When installed rearward facing this restraint is 630 mm long, 460 mm wide and 440 mm high. Check the measurement between the front of the seat back of the rear seat and all front seats in the car in which the restraint is intended to be used to ensure the space available is sufficient.

INSTALLED LENGTH = 630mm

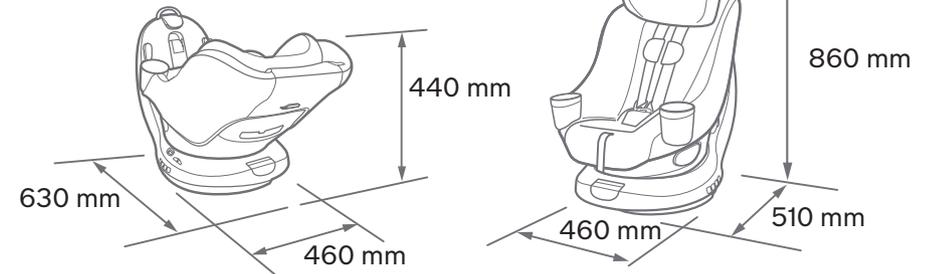

Only install the child restraint in a forward facing vehicle seat. Never install in a seat that faces the rear or the side of the vehicle.

Never install the Child Restraint in a seat with a front airbag. DEATH or SERIOUS INJURY may occur. Refer to your vehicle Owners Manual for airbag warnings and information.

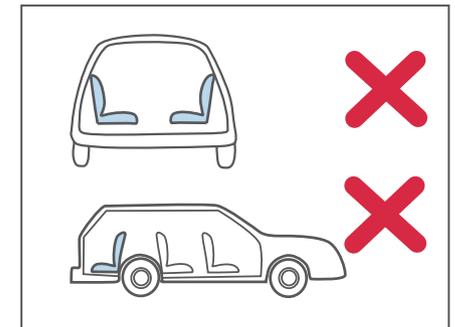

The use of child restraints in the front seat may be restricted for children of specific ages by local legislation. Please check with your local Department of Transport for the specific seating locations of children using child restraints for their given ages.




Adjustments

Headrest Height


See pages 33 and 41 for information on the correct headrest heights.

- 1 - Locate the Headrest Adjustment Lever and squeeze it while moving the headrest up or down until it locks into one of the 10 available positions.

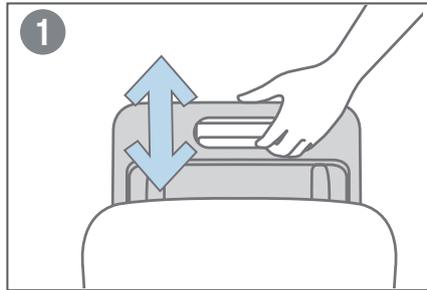

Headrest Back Fabric

- 2 - The Headrest back fabric has 3 folding positions. After adjusting the Headrest fold or unfold the back fabric to provide proper support.

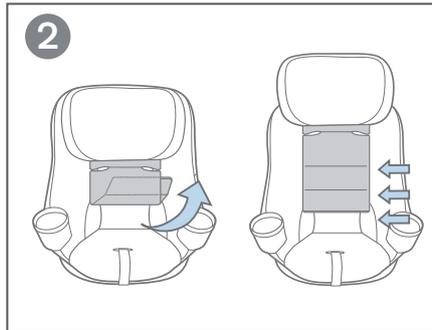


Seat Rotation

- 3 - The seat can be rotated on the base. Adjust by lifting the release lever on the side of the seat and rotating the seat.

After rotating the seat listen for a **CLICK**.

Check the seat is locked into position by pushing or pulling it.

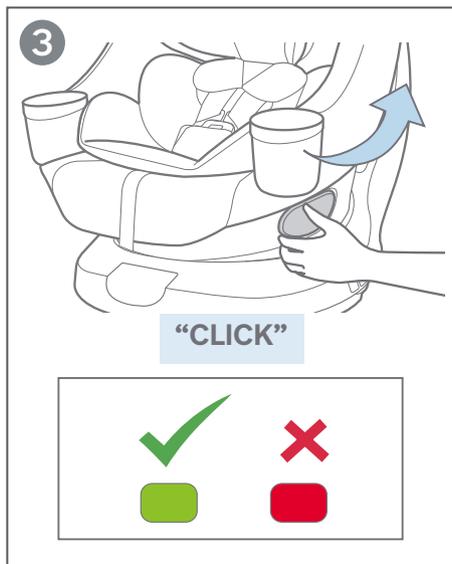

ALWAYS make sure the turn lock indicator is green, even when the child is not in the seat.



Adjustments - Recline Angle

IMPORTANT: A correct recline angle is essential for your baby's safety.

Make sure the vehicle is on a flat and **LEVEL** surface.


NEVER adjust the recline when vehicle is on an incline.

- 1 - Adjust the recline by pulling the recline adjustment lever to unlock the latch.

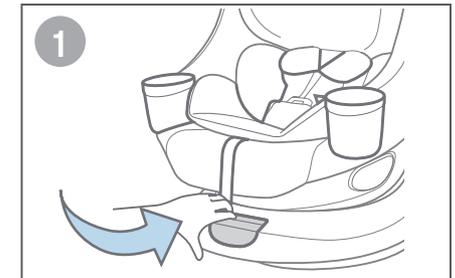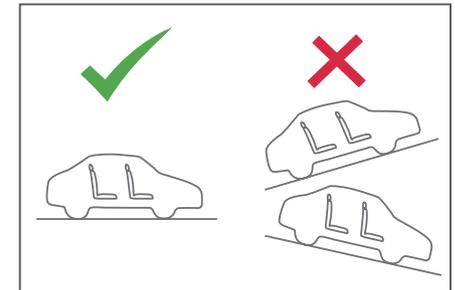


Rear Facing

- 2 - Place the child restraint on the vehicle seat. Pull the rotate lever and turn the child seat to rear facing.

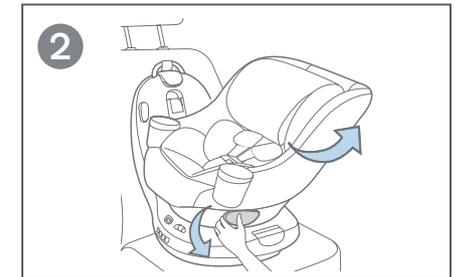


- 3 - Recline the seat to position 1, 2 or 3.

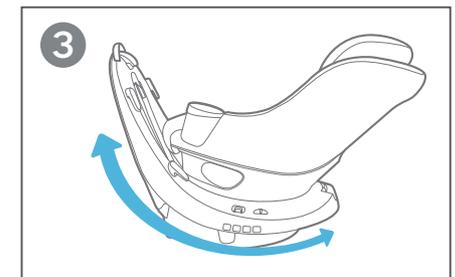


DO NOT USE POSITION 4

Adjustments - Recline Angle

4 - The level indicator on the child restraint window must show FULLY BLUE.

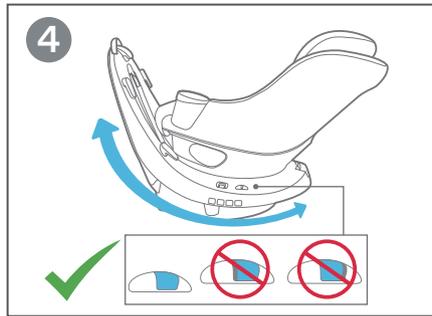


5 - If needed, a rolled towel may be placed under the child restraint at the vehicle seat bight, until the bubble is completely in the blue area.

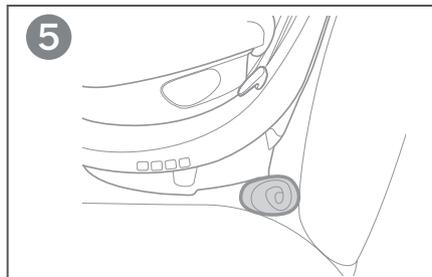

Forward Facing

6 - Follow steps 1. Then select a recline position.

NOTE: All numbered positions can be used.

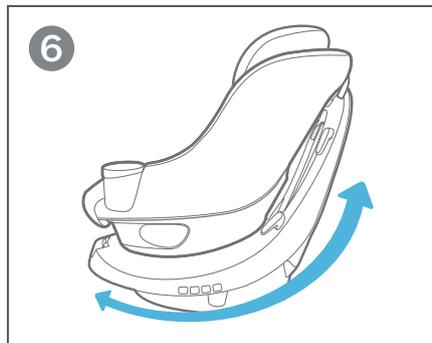


7 - Use the labels on the side of the base as a guide for suitable recline positions.




Installation - Seating Location

The safest position for this child restraint is in the centre rear of the back seat provided it is fitted with a lap/sash seat belt and a tether anchorage.

DO NOT use the front seating position unless there is no rear seat and there is a tether strap mounting position available behind the front seat.

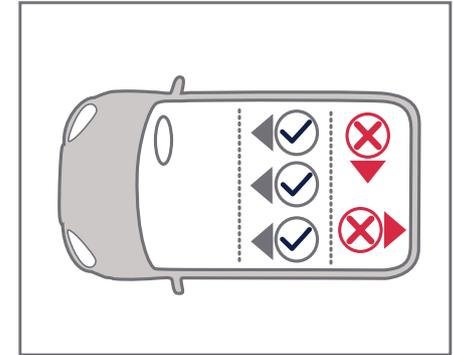

NOTE: In some vehicles (mostly utes or pickups), the tether strap mounting position is behind the vehicle seat backrest and is so close to the back of the restraint that the tether cannot be tensioned. In this case refer to a licenced child restraint fitter for advice.

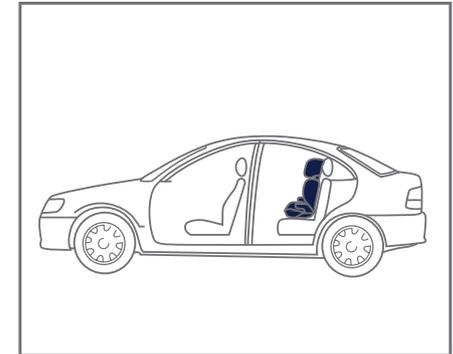

Installation - airbags

Side Airbags - if your vehicle has side airbags consult the Vehicle Owners Handbook for information regarding suitable child restraint installation positions. If in doubt refer to a licensed child restraint fitter for advice.

Installation - seatbelt airbags

Do not install this restraint using a seatbelt that has an inflatable airbag attached to it.

Installation - Base


IMPORTANT: Only install using a lap-sash belt.
DO NOT use ISOFIX connectors.

- 1 - Rotate the child restraint seat to the rear facing position.

NOTE: even if the child restraint is to be used forward facing, the base must be installed with the seat rear facing to allow access to the belt path.




- 2 - Open the two stage lock-off bar on the child restraint base.

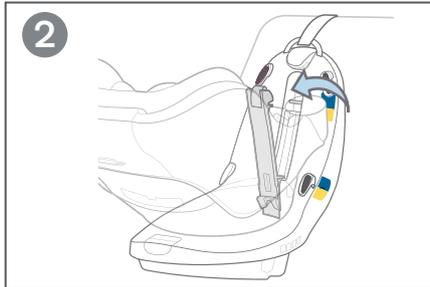


- 3 - Feed the lap-sash belt through the belt path inside the lock-off area on the child restraint base and buckle the lap-sash belt.

Make sure the belts are **UNDERNEATH** all three belt guides.

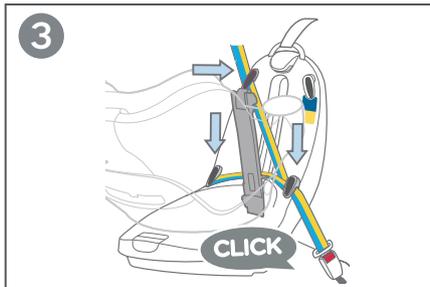


- 4 - Tighten the lap-sash belt. Push the child restraint down firmly while tightening to remove any slack in the belts.

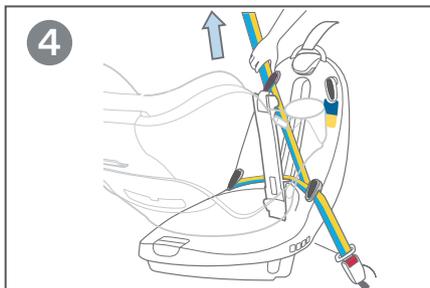

Installation - Base

- 5 - Once the lap-sash belt is tight, close the lock-off bar. Keep your hands clear of the lock-off area while closing the bar.


Review the checklist below, then install the top tether strap.

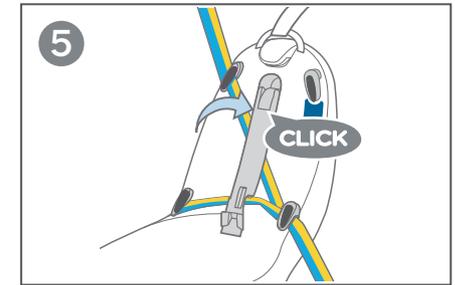

BELT PATH OVERVIEW

Note the beltpaths are the same for rearward and forward facing


Look for these labels showing the correct belt path

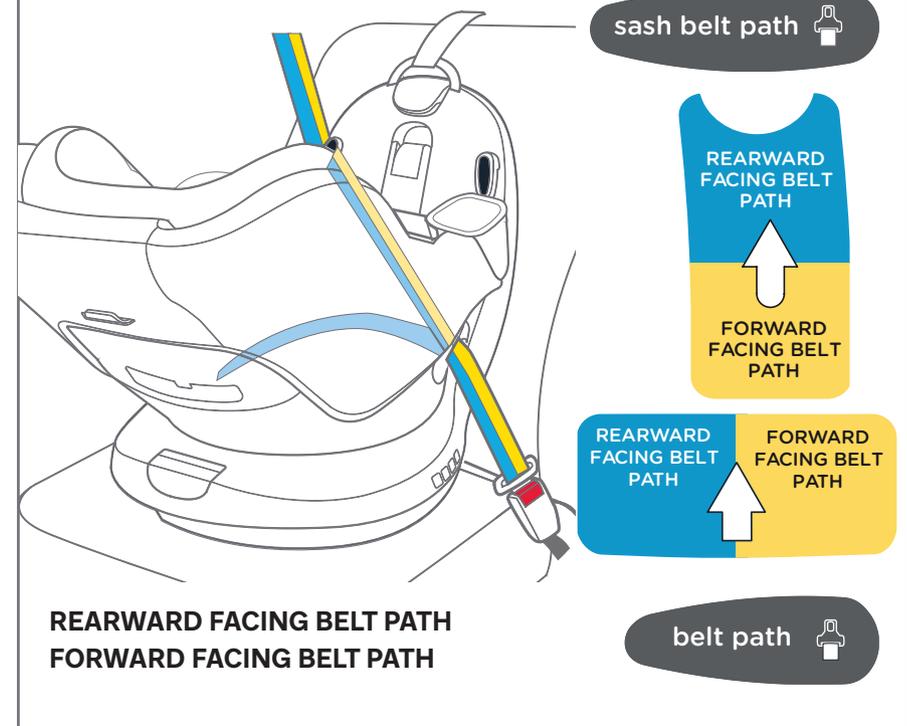

REARWARD FACING BELT PATH
FORWARD FACING BELT PATH

Installation - Base

Checklist

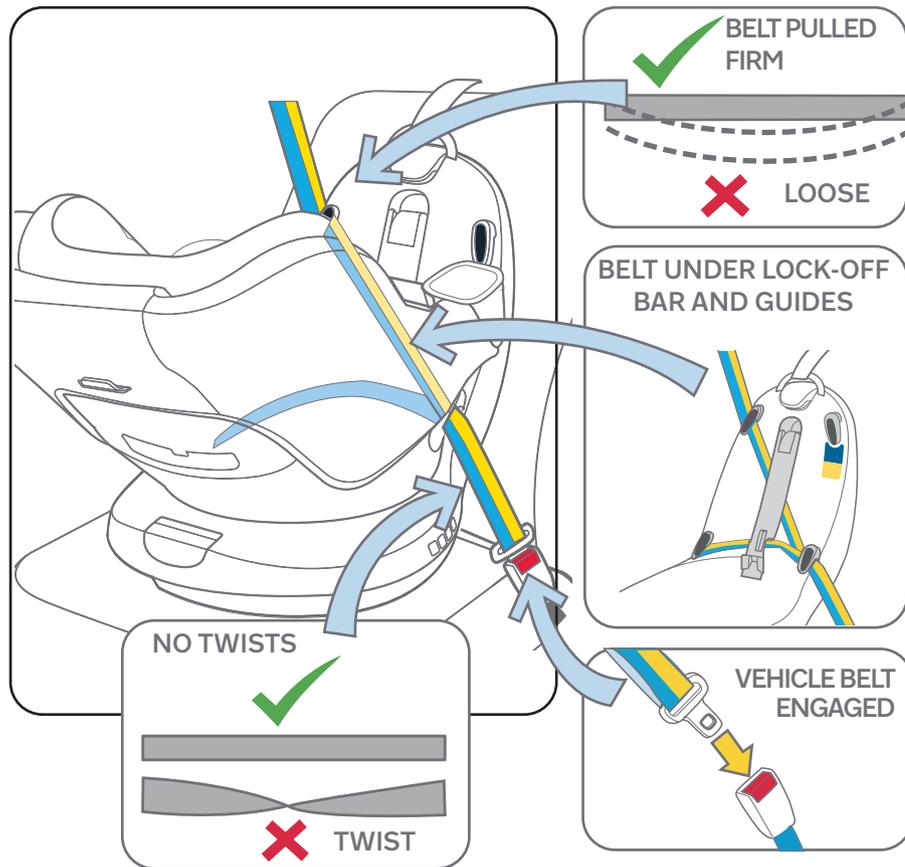

Top Tether Strap

⚠ WARNINGS - TETHER STRAP

- THIS RESTRAINT MUST BE ATTACHED TO A CHILD RESTRAINT UPPER ANCHORAGE POINT IN THE CAR. REFER TO CAR OWNERS HANDBOOK FOR LOCATION OF UPPER ANCHORAGE POINTS. REFER TO A CHILD RESTRAINT FITTING STATION IF NO ANCHORAGE POINTS ARE IN THE MOTOR CAR.
- ALWAYS ATTACH HOOK AND REMOVE SLACK.
- THIS RESTRAINT IS NOT SUITABLE FOR USE WHERE THE TOP TETHER STRAP MAY FALL INTO A SPLIT IN THE SEAT BACK OR OFF THE SIDE OF THE SEAT.
- Always secure the loose end of the top tether strap to prevent it hanging out of the car or being accessible by the child. Store it in the bag attached to the top of the tether strap.
- CAUTION: CHILDREN CAN BE INJURED OR RESTRAINTS AND TOP TETHER STRAP DAMAGED BY UNSECURED CARGO IN A COLLISION. SECURE OR REMOVE HAZARDOUS CARGO BEFORE USING THIS CHILD RESTRAINT.

TETHER ANCHORAGE FITTINGS: most vehicles have in-built top tether anchorage fittings. Consult the vehicle owners handbook for their location.

If the vehicle does not have an in-built upper anchorage fitting contact a retail outlet to obtain an upper anchorage kit.

AUSTRALIA: a vehicle without built-in anchorage fittings should have threaded holes for an after-market fitting to be installed into. See page 31.

NEW ZEALAND: imported vehicles often do not have anchorage fittings and anchorage points. If this is the case an after-market anchorage fitting will need to be purchased and a hole drilled for its installation. See page 32.




Installation - Top Tether Strap

This child restraint has a tether strap permanently attached to the top of the base. This is an essential part of the child restraint safety system and must always be used.

Tether end cover for unused webbing

Tether Strap

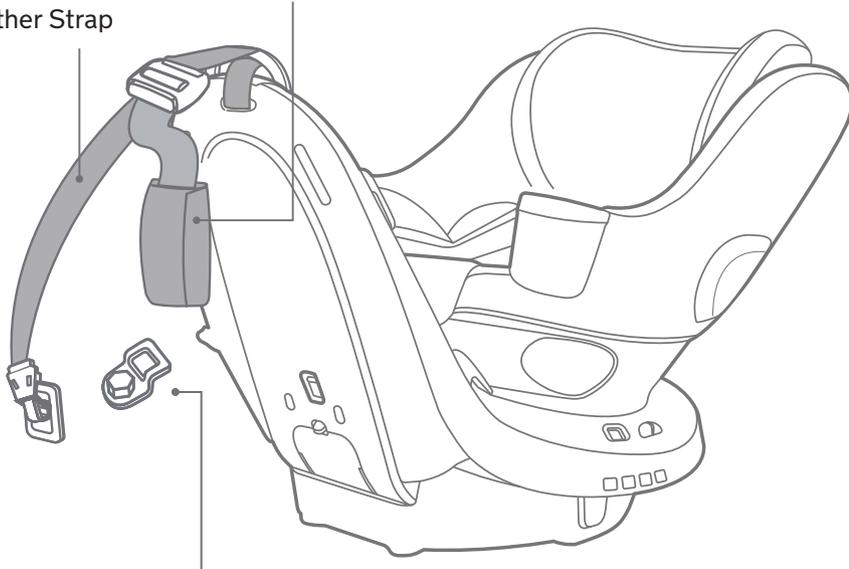

Tether Attachment Clip.


NOTE: most vehicles have tether anchorages built into the back of the seat. A separate tether anchorage may not be required.

IMPORTANT


Even when the child restraint is not occupied ensure at least the tether strap is connected. In the event of a sudden stop or accident the restraint may move about and possibly cause injury.

Installation - Top Tether Strap

Always connect the snap hook securely to the anchorage fitting.

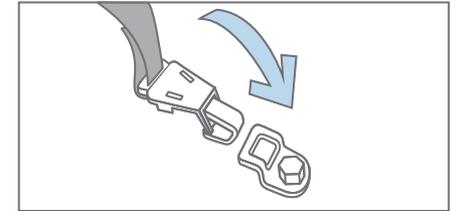


NOTE: many built-in anchor fittings are on the back of the vehicle seat.

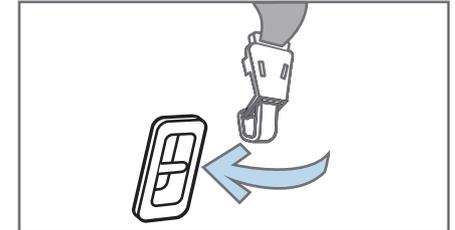


Adjust the tether to a firm fit.


Press button and pull lower web to reduce tension

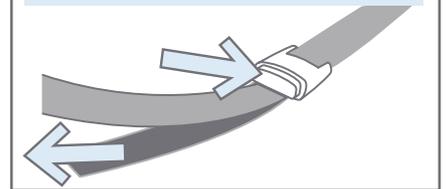

Press button and pull upper web to increase tension

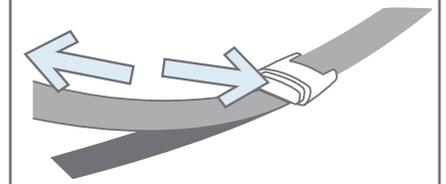

Store loose end of web in tether cover.

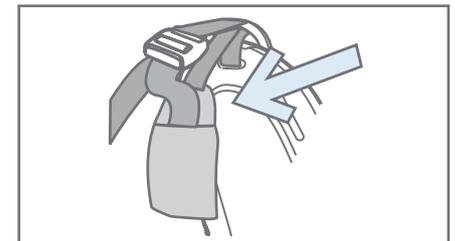

Installation - Top Tether Strap

Top Tether Checklist

CHECK: NO TWISTS

CHECK: PULL TIGHT

CHECK: LOOSE END IN TETHER COVER

CHECK: attachment clip connected securely to correct anchor fitting

Back of seat

Parcel shelf

⚠ WARNING


Always secure the loose end of the top tether strap. Do not use the child restraint where this strap may fall into a split in the seat back or off the side of the seat.

Installation - Anchorage Fitting


If the car is fitted with a child restraint anchorage point:

Locate the anchorage point behind the rear seating position (consult the vehicle owners handbook for location of the anchorage point). Remove the thread plug from the parcel shelf/floor/roof and install the attachment bolt as shown opposite.

CAUTION:
DO NOT OVERTIGHTEN THE ATTACHMENT BOLT.
MAXIMUM TORQUE 20Nm.

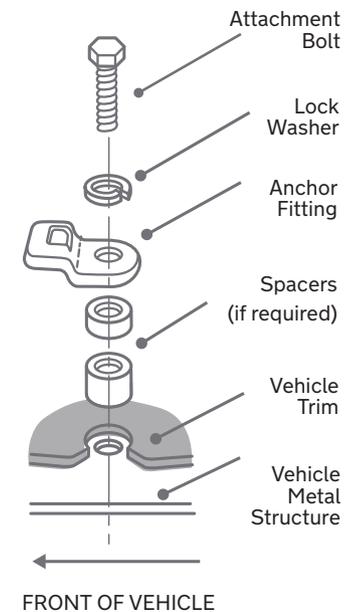

The anchor fitting must be aligned as shown unless stated otherwise in the vehicle owners handbook.

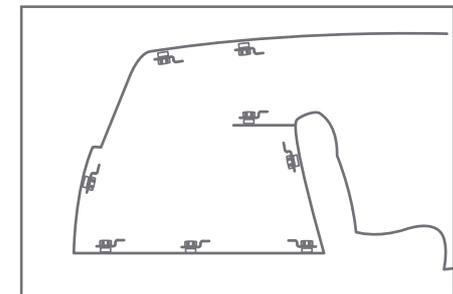

⚠ WARNING

CHILD RESTRAINTS MUST NOT BE ATTACHED TO UNSOUND METAL OR WOOD OR SYNTHETIC STRUCTURES. WHEN DRILLING THE 9 MM HOLE DO NOT DRILL THROUGH FUEL LINES, FUEL TANKS, ELECTRICAL WIRING, OR RADIO SPEAKERS. WEBBING STRAPS MUST BE PROTECTED FROM SHARP CORNERS AND EDGES.

THE ANCHOR FITTING MUST BE USED ONLY AS DESCRIBED ABOVE. IT MUST NOT BE HOOKED ONTO ANY OTHER OBJECT.

Installation - Anchorage Fitting

If the car is not fitted with a child restraint anchorage point:



For sedans only - drill a 9 mm hole in the parcel shelf on the center line of the seating position as shown below.

Install the anchor bolt as shown. It is recommended that this installation be carried out by a child restraint fitting station or licenced motor mechanic.

For vehicles other than sedans - in Australia, consult your nearest child restraint fitting station or traffic authority for vehicle inspection to find the best, correct position for the placement of the anchorage point, and for the correct attachment bolt length and use of spacers.

In New Zealand, consult the agent for the vehicle.

If drilling a new hole, select a position on the centre line of the seating position, and no closer than 100 mm from the front edge of the parcel shelf.

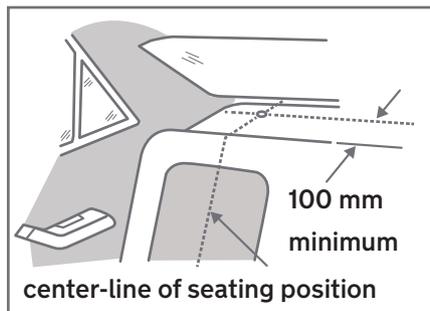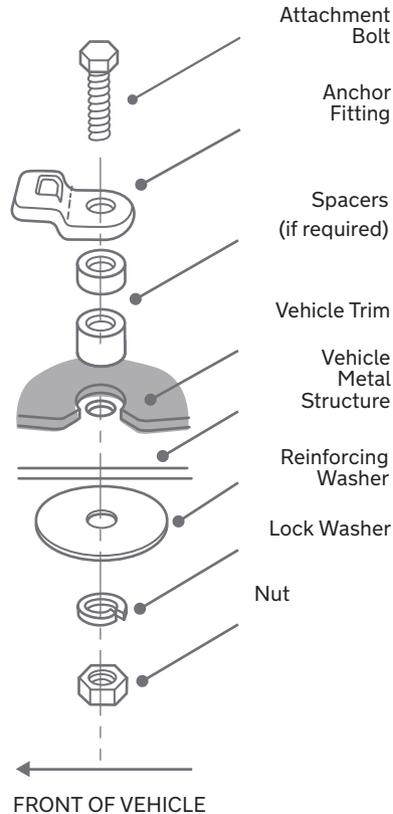

USE - Shoulder Height Labels

Rear Facing

This restraint has a shoulder height level label.

Use this label to decide if the restraint should be rear or forward facing.

If your child's shoulders are below the bottom dotted line A the restraint must be rearfacing.

Once your child's shoulders pass the line A they can be either rearfacing or forward facing.

Once your child's shoulders reach the dotted line B the restraint must be forward facing.



SHOULDERS BELOW THIS LINE WHEN HEADREST AT HIGHEST POSITION

MUST BE FORWARD FACING WHEN SHOULDERS ABOVE THIS LINE

B

MUST BE REAR FACING WHEN SHOULDERS BELOW THIS LINE

A

IMPORTANT
Children are safer rear facing. Nuna recommends that they remain rear facing for as long as they are comfortable in this position

USE - Shoulder Strap Height

Rear Facing

Correct positioning of the shoulder straps is essential for your baby's safety.

Requirement:

The shoulder straps must be in the slots which are nearest to the child's shoulders, but not lower than the child's shoulders.

The straps should be in the next available adjustment position above your child's shoulders.

Note: the shoulder strap slots are in the bottom of the headrest.

The shoulder strap height requirement forward facing is different to rear facing.

To Check:



With baby placed in the restraint, note where the shoulder straps are positioned relative to the shoulders.

To Adjust:

If adjustment is needed squeeze the headrest adjuster handle and raise or lower the headrest and shoulder straps as required.

IMPORTANT

Always adjust the height of the shoulder straps as the child grows

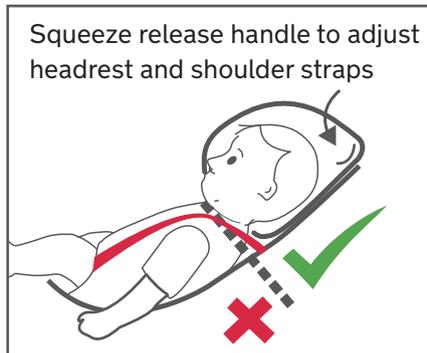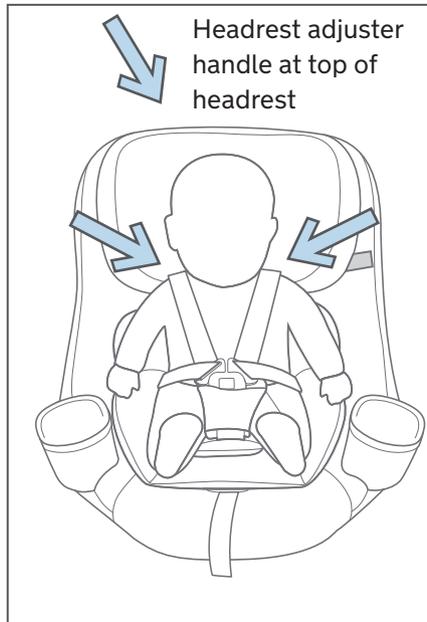

USE - Infant Insert

Rear Facing





The Infant Insert can be used to provide a snug fit for small babies.

Removing Infant Insert:

- 1 - Pull the Rotate Lever and turn the child restraint seat to the side position for easier access.
- 2 - Press button and remove the Buckle Tongues from Harness Buckle.
- 3 - Remove the Crotch Pad.
- 4 - Gently pull the Infant Insert upwards, threading the Harness Buckle through the insert to remove it. Then re-attach the Crotch Pad and Harness Covers.

NOTE: the infant insert should be used for babies and small children only.

It should be removed when it restricts the child's movement.

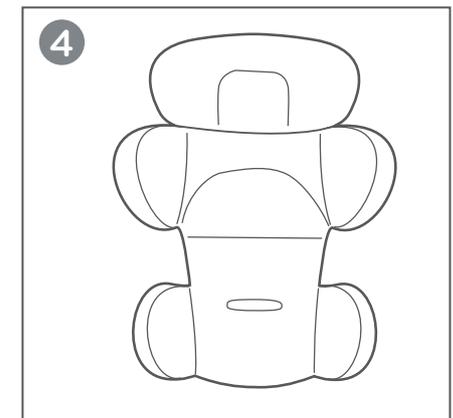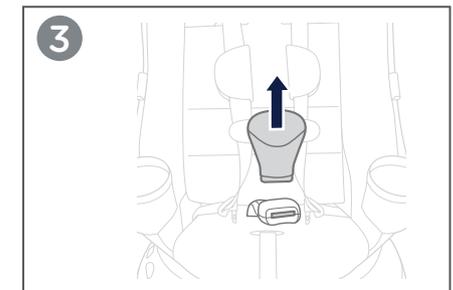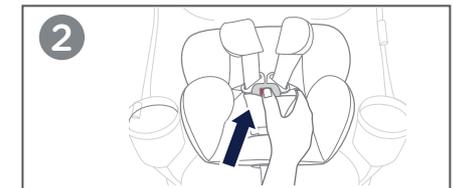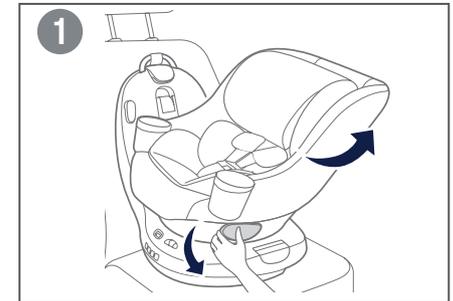

USE - Using the Harness

Rear Facing

IMPORTANT

Babies and small children need to be rear-facing for best distribution of deceleration forces during a sudden stop or accident.



First check shoulder strap height and adjust if necessary.

See page 33.

- 1 - Loosen harness by pressing on adjuster button A while pulling on the harness straps B.

NOTE: The harness adjuster button is under the fabric flap at the front of the seat.

- 2 - Press button to open the quick release buckle. Spread harness straps apart.

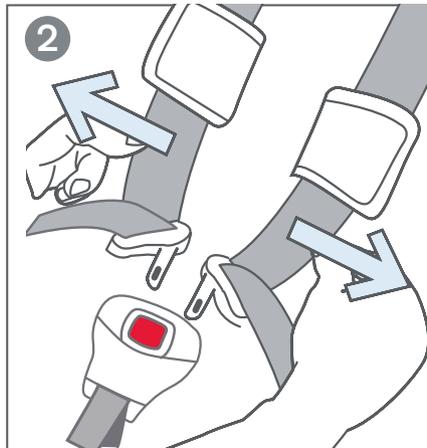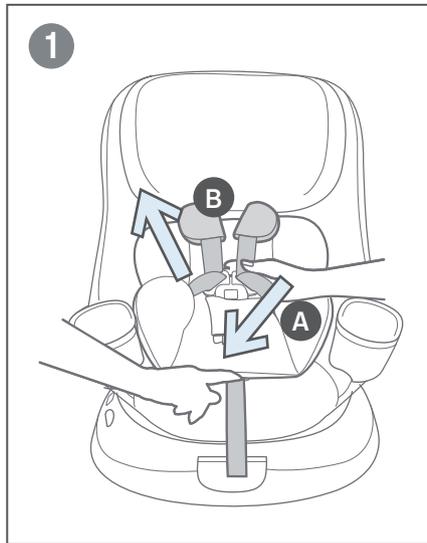

USE - Using the Harness

Rear Facing

- 3 - Place child in restraint in seated position.

IMPORTANT

Child must be dressed in clothing that allows the harness to firmly secure them.

- 4 - Child must be placed firmly against both the back and bottom of the seating surface.


IMPORTANT

Infants need to be securely held by the harness. An infant wrapped in a blanket or swaddled will not be securely held and may be ejected and killed in an accident.


The harness needs to fit the infant securely.

Only place any blanket or other covering over the harness after it is adjusted.

Do not bind or wrap the infants arms or legs together.

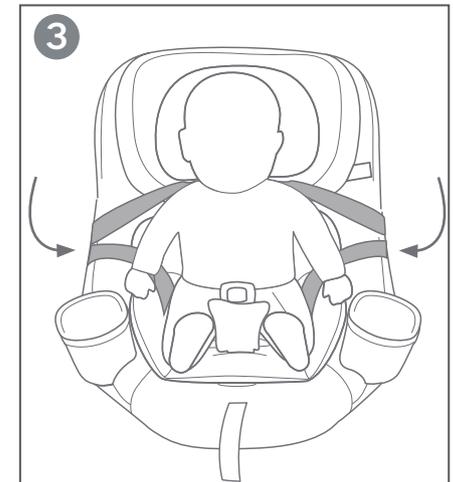

Use the magnetic clips to hold the buckle tongues

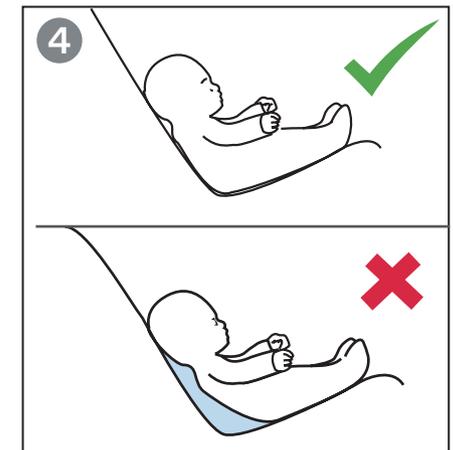


USE - Using the Harness


Rear Facing

5 - Place buckle tongues into the quick release buckle.


IMPORTANT
The buckle tongues must "CLICK" when locked into place. If they do not click, try again or try cleaning the buckle.

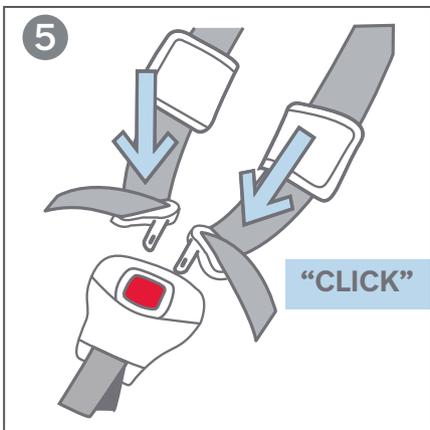

6 - Make sure there are no twists in the straps.

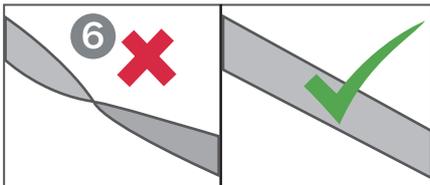

7 - Recheck shoulder strap height.

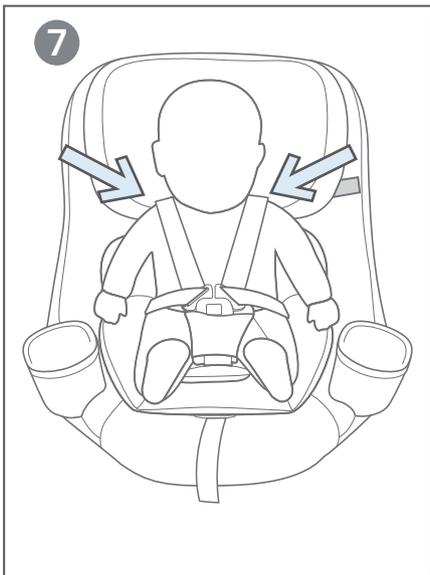

⚠ WARNING
DO NOT LEAVE CHILDREN UNATTENDED IN THE CAR

USE - Using the Harness


Rear Facing

8 - Tighten harness by pulling on the adjuster strap at the front of the restraint.

Shoulder straps should be a snug fit.

Note: sometimes the straps may be loose in the lap part of the harness. You may need to pull loose straps through the buckle tongues upward towards the child's shoulder and then pull again on the adjuster strap.



This may need to be repeated several times to get a snug fit.

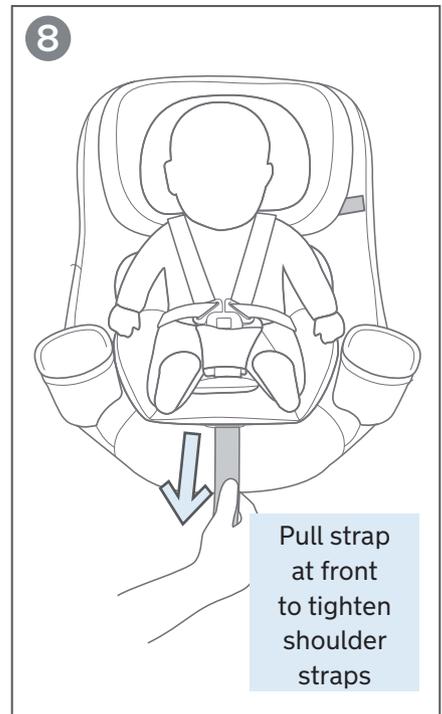

9 - Correct strap tension.

Put a finger under each strap and pull gently outwards.

There should be no gap between your finger and the baby.

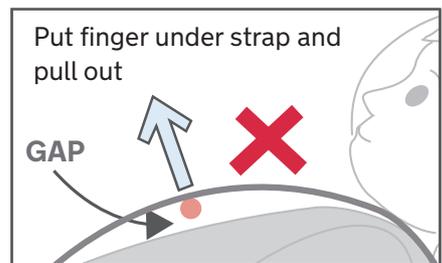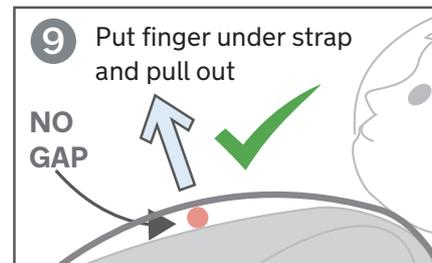

USE - Using the Harness

Rear Facing

Checklist

Shoulder Straps - must always be at correct height and pulled tight.



Harness Straps - must not be twisted.

Quick Release Buckle - must always be securely fastened.

Recline angle - do not use position 4.

Suitable clothing - child's clothing must allow the harness to securely grip the child.

Turn lock indicator is green

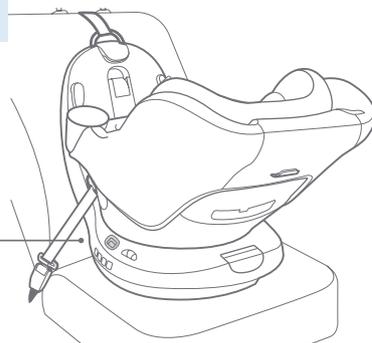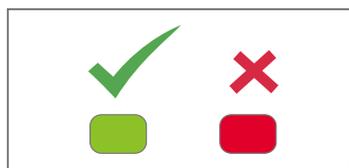

Shoulder Height - shoulders must be at or below the marker line

Infant Insert - only use for smaller children who require more support.

Child position - child must be in full contact with back of restraint.

Harness Tension - pull harness tight.

USE - Shoulder height Labels

Forward Facing

This restraint has a shoulder height level label.


Use this label to decide if the restraint should be rear or forward facing.

If your child's shoulders are below the bottom dotted line A the restraint must be rearfacing.

Once your child's shoulders pass the line A they can be either rearfacing or forward facing.

Once your child's shoulders reach the dotted line B the restraint must be forward facing.

Once your child passes line C they are too big for this restraint and need to move to a bigger harnessed restraint or a Booster Seat.

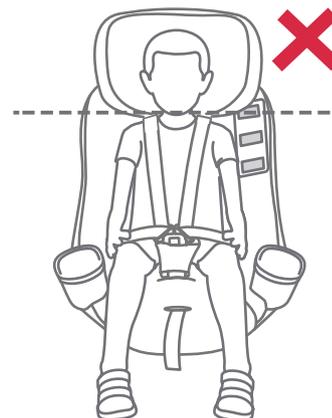

C

SHOULDERS BELOW THIS LINE WHEN HEADREST AT HIGHEST POSITION



B

MUST BE FORWARD FACING WHEN SHOULDERS ABOVE THIS LINE



A

MUST BE REAR FACING WHEN SHOULDERS BELOW THIS LINE



Use - Shoulder Strap Height

Forward Facing

Correct positioning of the shoulder straps is essential for your child's safety.

Requirement:

The shoulder straps must be in the slots which are nearest to the child's shoulders, but not more than 25 mm below the child's shoulders.

Note: the shoulder strap slots are in the bottom of the headrest.

The shoulder strap height requirement forward facing is different to rear facing.

To Check:

With child placed in the restraint, note where the shoulder straps are positioned relative to the shoulders.

To Adjust:


If adjustment is needed squeeze the headrest adjuster handle and raise or lower the headrest and shoulder straps as required.

IMPORTANT

Always adjust the height of the shoulder straps as the child grows.



Squeeze release handle to adjust headrest and shoulder straps

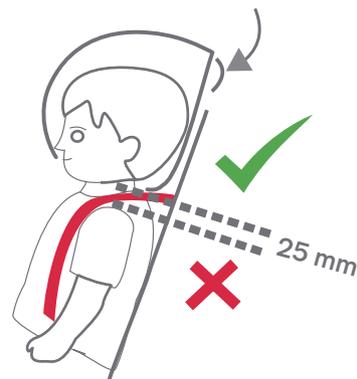

USE - Securing the Harness



Forward Facing

First check shoulder strap height and adjust if necessary.

- 1 - Loosen harness by pressing on adjuster button **A** while pulling on the harness straps **B**.

NOTE: The harness adjuster button is under the fabric flap at the front of the seat.

- 2 - Press button to open the quick release buckle. Spread harness straps apart.

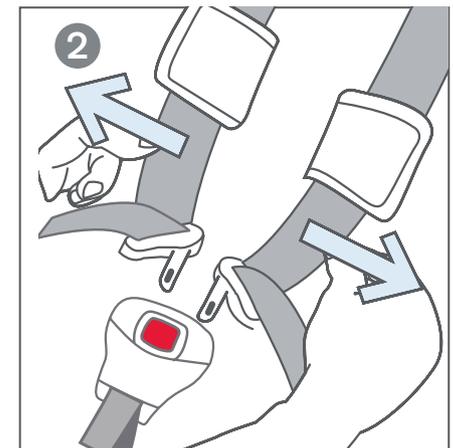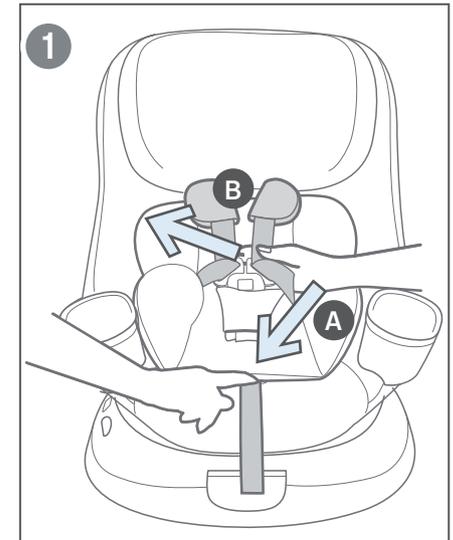

USE - Securing the Harness

Forward Facing

- 3 - Place child in restraint in seated position firmly against both the back and bottom of the restraint.

IMPORTANT



Children need to be securely held by the harness. Children must be dressed in clothing that allows the harness to firmly grip them.

Do not wrap the child in a blanket or similar. Only place such covering over the child after they are strapped in.

- 4 - Place buckle tongues into the quick release buckle.

IMPORTANT


The buckle tongues must "CLICK" when locked into place. If they do not click, try again or try cleaning the buckle.

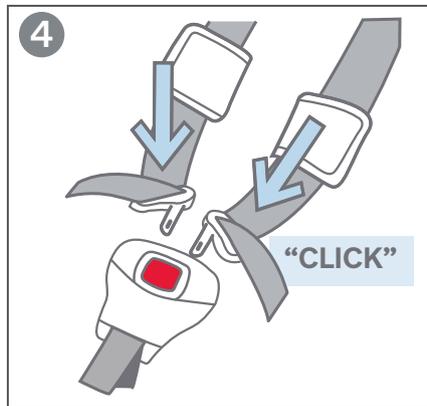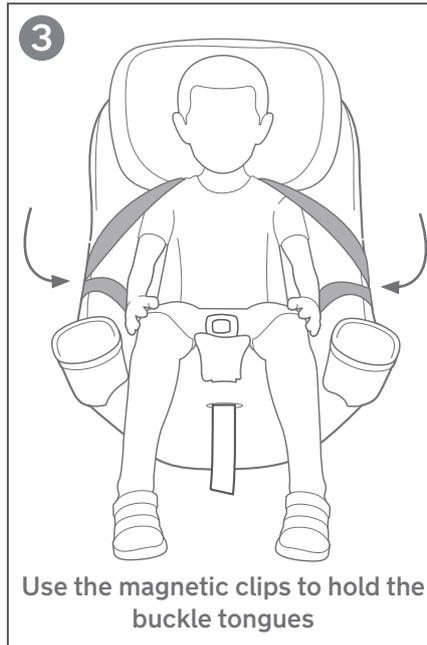

USE - Securing the Harness

Forward Facing

- 5 - Make sure there are no twists in the straps.

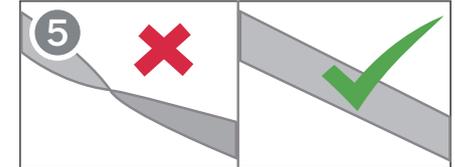

- 6 - Recheck shoulder strap height.

- 7 - Tighten harness by pulling on the adjuster strap at the front of the restraint.


Note: the lower harness webbing may not pull freely through the harness buckle tongues.

You may need to pull the webbing through the buckle tongues up towards the child's shoulder then pull on the adjuster strap again.

This may need to be repeated several times to get the webbing fitting snugly.

WARNING

DO NOT LEAVE CHILDREN UNATTENDED IN THE CAR


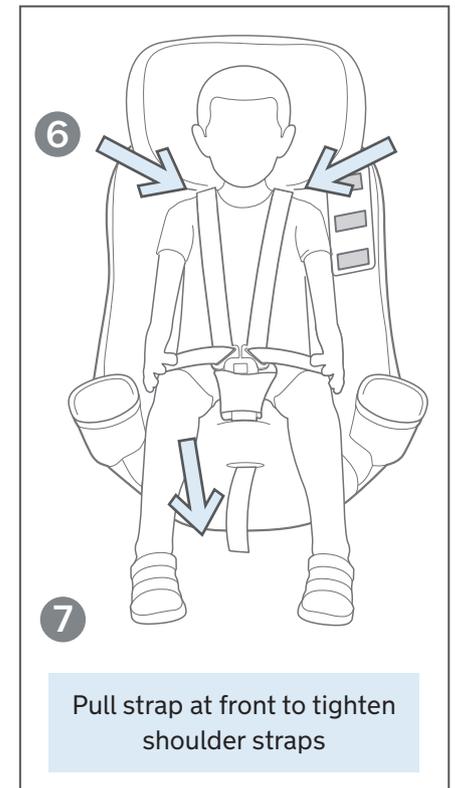


USE - Securing the Harness

Forward Facing

8 - Correct strap tension.

Put a finger under each strap and pull gently outwards. There should be no gap between your finger and the child.

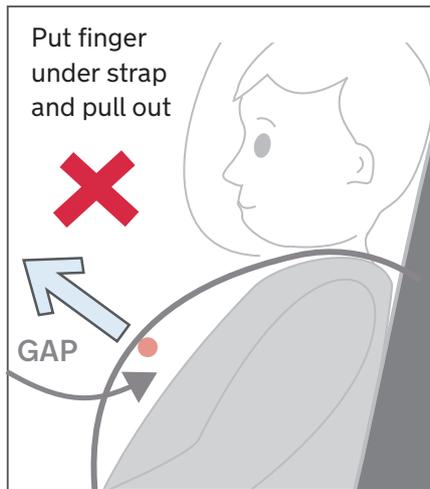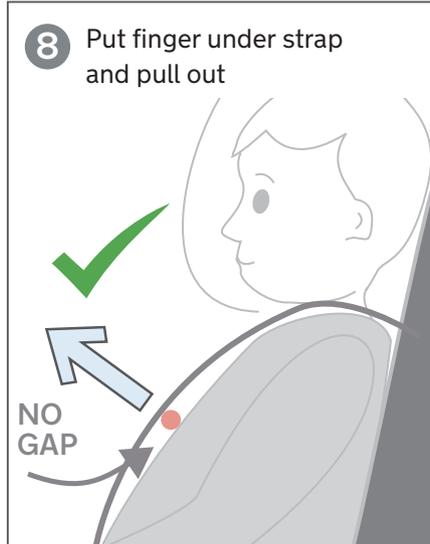

USE - Securing the Harness

Forward Facing

Suitable clothing - child's clothing must allow the harness to securely grip the child.

Checklist

Shoulder Straps - must always be at correct height and pulled tight.

Shoulder Height - shoulders must not be above the upper marker line


Harness Straps - must not be twisted.

Child position - child must be in full contact with back of restraint.


Quick Release Buckle - must always be securely fastened.

Harness Tension - pull harness tight.

Recline angle - use any position.

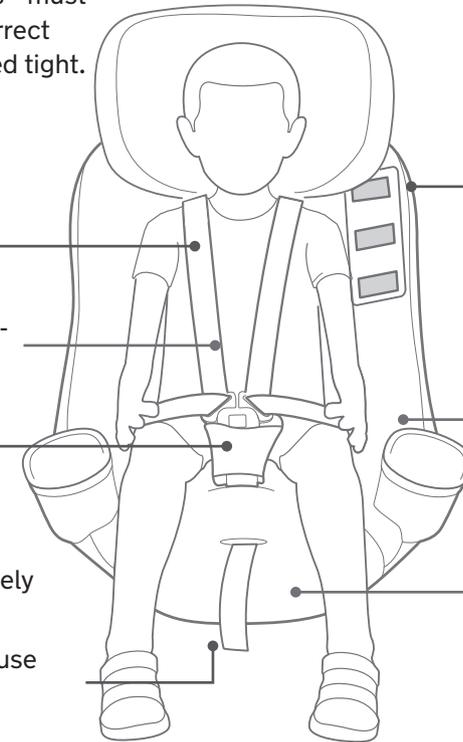


Turn lock indicator is green

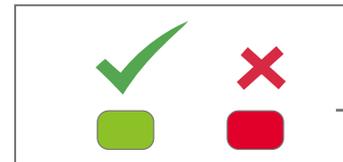


Cover - removing and refitting


1 - Pull the Rotate Lever and turn the child restraint seat to the side position.

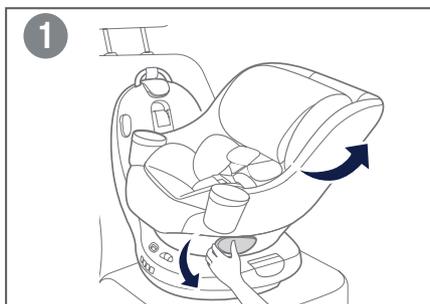


2 - Unbuckle the harness by pressing the release button on the Chest Clip.

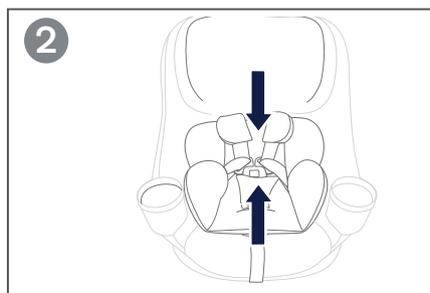

3 - Press button and remove the Buckle Tongues from Harness Buckle.

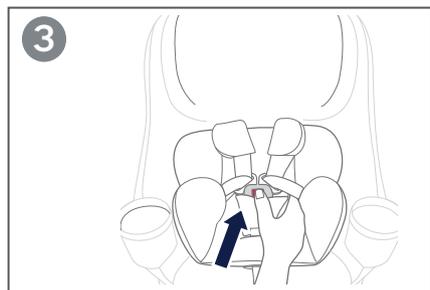


4 - Remove the Crotch Pad and the Harness Pads.

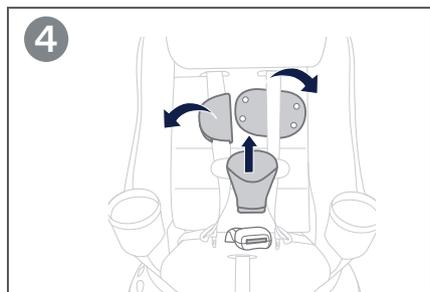


Cover - removing and refitting


5 - Gently pull the Infant Insert upwards, threading the Harness Buckle through the insert to remove it.

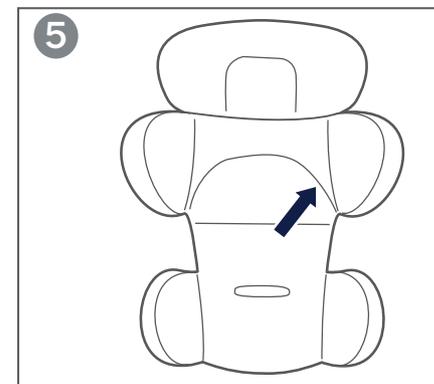


6 - On the BACK of the headrest, un-hook BOTH elastic straps of the headrest cover from the headrest.

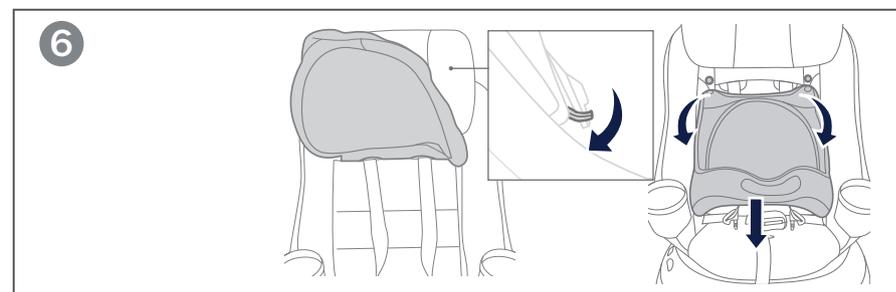

Then pull the headrest cover forward and undo the BOTH snaps on the bottom of the headrest cover and remove the headrest cover.

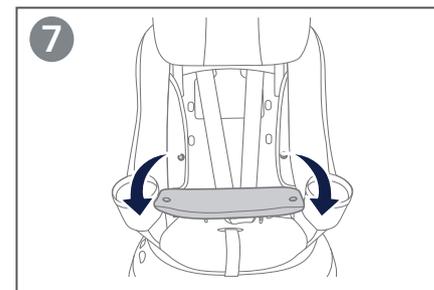


7 - Undo the two buttons inside seat shell, pull backrest fabric forward, slide buckle through fabric slot.

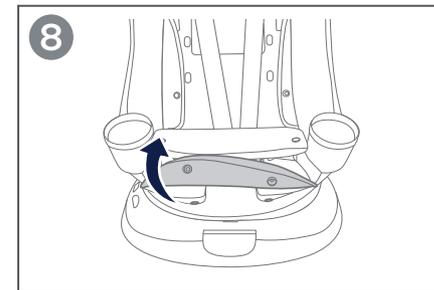


8 - Undo the two buttons on the bottom of the seat fabric.

Cover - removing and refitting


9 - Undo the two buttons located on either side of the seat.

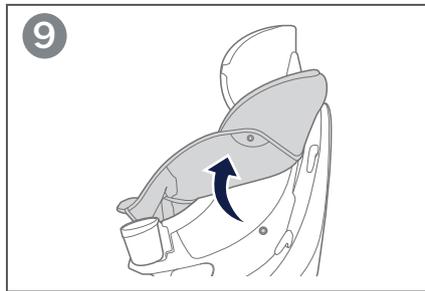


10 - Lift bottom fabric up away from the seat shell.

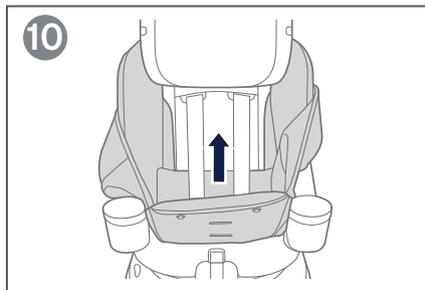

11 - Lower the headrest to the LOWEST position.

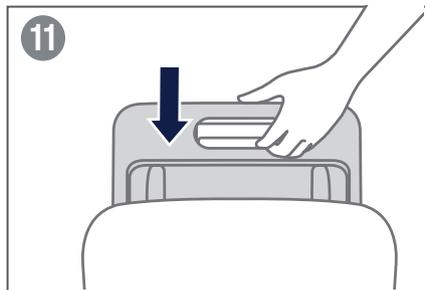


12 - Undo the clip on the fabric from the top of the seat shell.

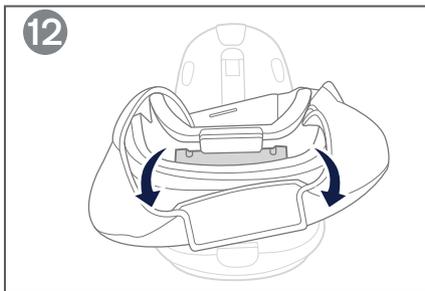

Cover - removing and refitting

13

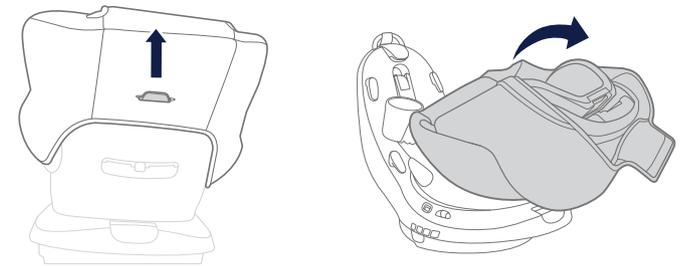

13- Pull the softgoods up around the seat shell and completely remove.

To re-assemble, follow these steps in reverse order

VERY IMPORTANT

Only replace the cover with a manufacturer's supplied replacement cover with identical shoulder height markers or a replacement cover meeting AS/NZS 8005.

After this Restraint

This restraint is suitable for a child of average size up to approximately four years of age.

When the child has outgrown this restraint, the next suitable types of restraint are a bigger harnessed seat or a booster seat.


Some harnessed seats are suitable for children up to approximately 8 years of age.

Illustrated: typical Type G

Booster seats are available for children up to approximately 10 years of age.

IMPORTANT

Children are at risk of serious injury if they move to booster seats too early.

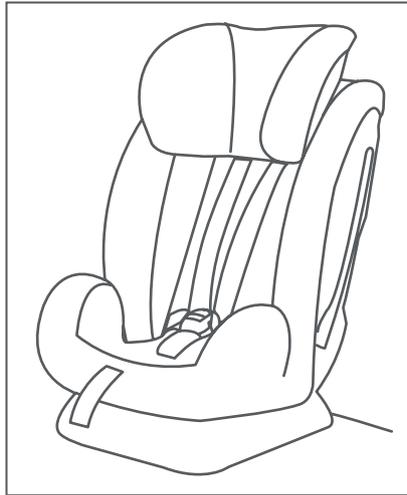

Care, Maintenance and Storage

Seat Cover

Wash with warm water (under 30°C) and mild detergent.

Do not iron.

Do not bleach or dry clean.

Do not twist the soft goods to dry with great force. It may leave the seat cover with wrinkles.

Hang dry the seat cover in the shade.

Plastic and Metal Parts

Use only mild detergent, water and a soft cloth to clean the car seat shell, handle and harness straps. Air dry.

Do not use undiluted detergent, or other solvents to clean - these may cause damage.

Harness Straps

Shoulder harness straps are not removable.

Clean with mild detergent, water and a soft cloth only.

Top Tether Strap

Either spot clean or replace.

Do not immerse the tether strap in water.

Harness Buckle

To clean the buckle rinse using warm water. Do not use any soaps, solvents or lubricants. Using anything other than water can cause the buckle to malfunction. Air dry.

When the buckle is operating correctly the tongues will push in easily and the tongues will CLICK when they latch into place.

If the buckle does not appear to be working correctly get it checked or replaced by contacting the retailer from where it was purchased, or by contacting Allison AU Pty Ltd

Storage

Remove the child restraint from the vehicle seat if not in use for a long period of time.

Store the child restraint in a cool, dry place where your child cannot access it.

Accessories and Spare Parts

Accessories

DO NOT add accessories, toys, padding or other items to the child restraint unless provided by Nuna.

Use of aftermarket accessories (i.e. items not provided in the box with the child restraint), can reduce the safety provided by the child restraint and may cause injury or death.

Any aftermarket accessory used should be compliant with AS/NZS 8005 (Accessories for child restraints for use in motor vehicles) and stated as suitable for use with this child restraint.

IMPORTANT: Do not use any accessory with this child restraint that directly restrains or stops the forward movement of the child's head or neck.

Spare Parts

If spare parts are required contact the retail outlet from where the restraint was purchased or contact the Australian distributor for the location of your nearest repair agent.

Repairs must only be done by an approved repair agent.



Distributed by Allison AU Pty. Ltd.

ACN: 642 240 140

Unit 1, 35 Lyn Parade, Prestons, NSW Australia 2170

For after-sales & warranty service, contact:

1800 951 070

customerservice@allisonau.com.au

